

TERMOCOPPIA AD ISOLAMENTO MINERALE (MgO) CON IMPUGNATURA MINERAL-INSULATED (MgO) THERMOCOUPLE WITH HANDGRIP

TIPO DI TERMOCOPPIA
THERMOCOUPLE TYPE

"K" (Ni Cr - Ni)	2
"N" (Nicrosil - Nisil)	3

MASSIME TEMPERATURE DI LAVORO
CONTINUO CONSIGLIATE (°C)
ADVISED MAXIMUM CONTINUOUS
OPERATING TEMPERATURES (°C)

ØA	K	N
1	820	910
1.5	860	950
2	880	980
3	940	1020
4.5	970	1100
6	1070	1100

DIAMETRO GUAINA
SHEATH DIAMETER


	ØA
10	1 mm.
15	1.5 mm.
20	2 mm.
30	3 mm.
45	4.5 mm.
60	6 mm.

LUNGHEZZA (L1)
LENGTH (L1)

	L1 = mm.
01	50 mm.
02	100 mm.
03	150 mm.
04	200 mm.
05	250 mm.
06	300 mm.
07	350 mm.
08	400 mm.
09	450 mm.
10	500 mm.
11	550 mm.
12	600 mm.
13	650 mm.
14	700 mm.
15	750 mm.
16	800 mm.
17	850 mm.
18	900 mm.
19	950 mm.
20	1000 mm.
22	1100 mm.
24	1200 mm.
26	1300 mm.
28	1400 mm.
30	1500 mm.
32	1600 mm.
34	1700 mm.
36	1800 mm.
38	1900 mm.
40	2000 mm.
42	2100 mm.
44	2200 mm.
46	2300 mm.
48	2400 mm.
50	2500 mm.
52	2600 mm.
54	2700 mm.
56	2800 mm.
58	2900 mm.
60	3000 mm.

Cod. 2 4 4 5 . 0 1 .

OSSIDO DI MAGNESIO COMPRESSO
COMPRESSED MAGNESIUM OXIDE

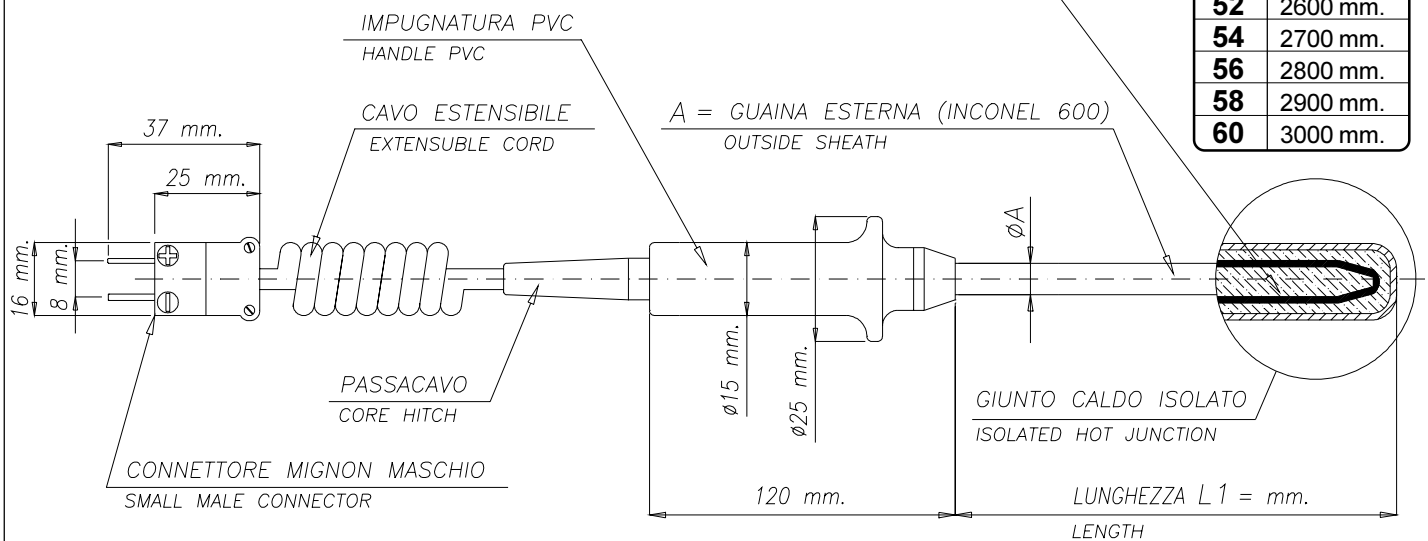

Tolleranze secondo norme IEC 584.2 cl.2 (+/- 2.5°C oppure +/- 0.75%) (vale il maggiore tra i due valori).
Tolerances according to IEC 584.2 cl.2 (+/- 2.5°C or +/- 0.75%) (the highest value applies).